


CxV-15 AIR SOURCE R-454B HEAT PUMP WATER HEATER



STANDARD FEATURES:

- 15 HP vapor injected scroll compressor
- Available only in 460/60/3
- R-454B (GWP of 466)
- 140°F (60°C) output down to -15°F (-26°C)
- Quiet, large diameter ECM Fan
- 304L stainless steel frame and enclosure
- Double wall 316L stainless steel condenser
- Integrated stainless steel end suction pump
- Industrial PLC with color touchscreen
- Expandable in arrays of up to 12 units
- Internal controls include temperature output control, lead-lag, unit array staging, run hour balancing across unit array, dynamic VFD staging, and 1-10 VDC custom output for auxiliary equipment control (booster pumps, louvers, etc.)
- BACnet and Modbus via MSTP or built in Ethernet
- Intelligent defrost, trace tape, and pan heater included
- Unit must be installed in an outdoor airspace
- Fits in standard construction elevators and hoists
- NSF/ANSI 61 rated
- UL-60335-2-40 Certified

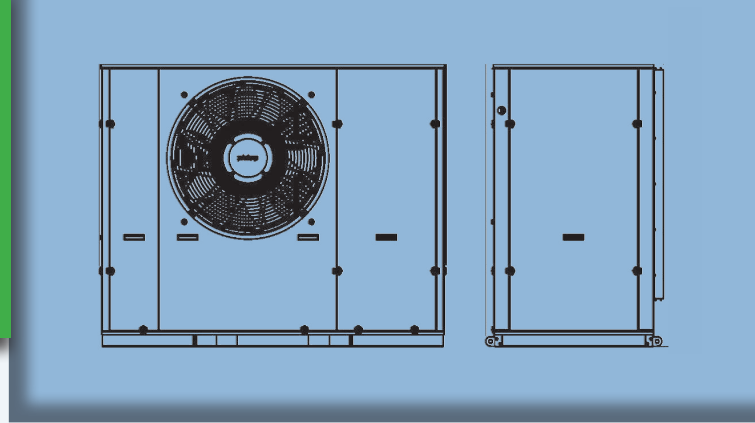

Made in the USA

AVAILABLE OPTIONS:

- Single point electrical distribution for multiple unit installations
- Hose kits for proper connection to the building
- Single wall condensers for hydronic heating
- Remote monitoring via Ethernet, Wi-Fi or Cellular

LEAD FREE
NSF/ANSI 61

